



Fast Pyrolysis Bio-Oil:

Roll out of pyrolysis technology

Building a sustainable European Biofuel industry

Gerhard Muggen, BTG Bioliquids B.V.

Gothenburg November 5, 2019



BTG Bioliquids company introduction




As a ***technology provider*** and ***product leader*** we are committed to the commercial deployment of our fast pyrolysis technology.

Explicitly made from biomass residues which is known as ***second generation*** (2G) or advanced bio fuel which means that it does not compete with the food chain.

Pyrolysis oil, the sustainable alternative



Fast Pyrolysis – development timeline BTG

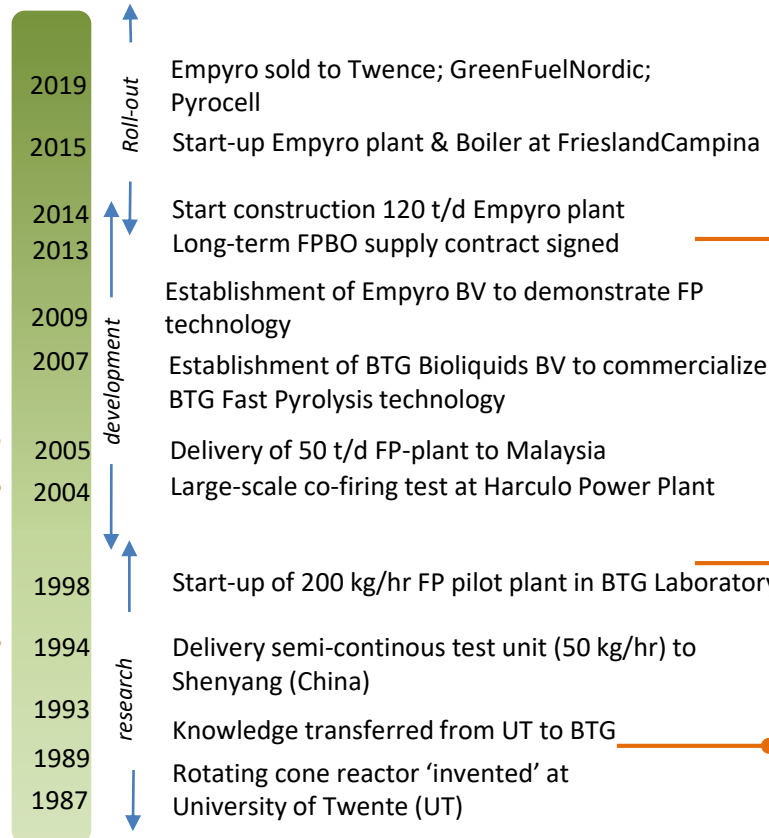

© 2019

Pyrolysis oil, the sustainable alternative

About Fast Pyrolysis



Pyrolysis oil, the sustainable alternative

What is fast pyrolysis?



- **Thermal cracking of organic material in the absence of oxygen**

- Main Product: Liquid Bio-oil

- Process conditions:

- $T = 400 - 600\text{ }^{\circ}\text{C}$

- $P = \text{atmospheric}$

- By products:

- Heat (Steam)

- Power (Electricity)

- **Works with most lignocellulosic (non-edible) feedstocks**

- Wood chips, sugar cane bagasse, straw, sunflower husk, etc.

- Qualify as feedstocks for “REDII” advanced biofuels

Typical Pyrolysis Oil Characteristics:


Composition	$\text{C}_2\text{H}_5\text{O}_2$ (average)
Density	1100 - 1200 kg/m ³
Heating value	17 - 20 GJ/m ³
Water content	20 - 30 wt. %
Ash	< 0.1 wt. %
Acidity (pH)	2.5 - 3



Pyrolysis oil, the sustainable alternative



The fast pyrolysis process

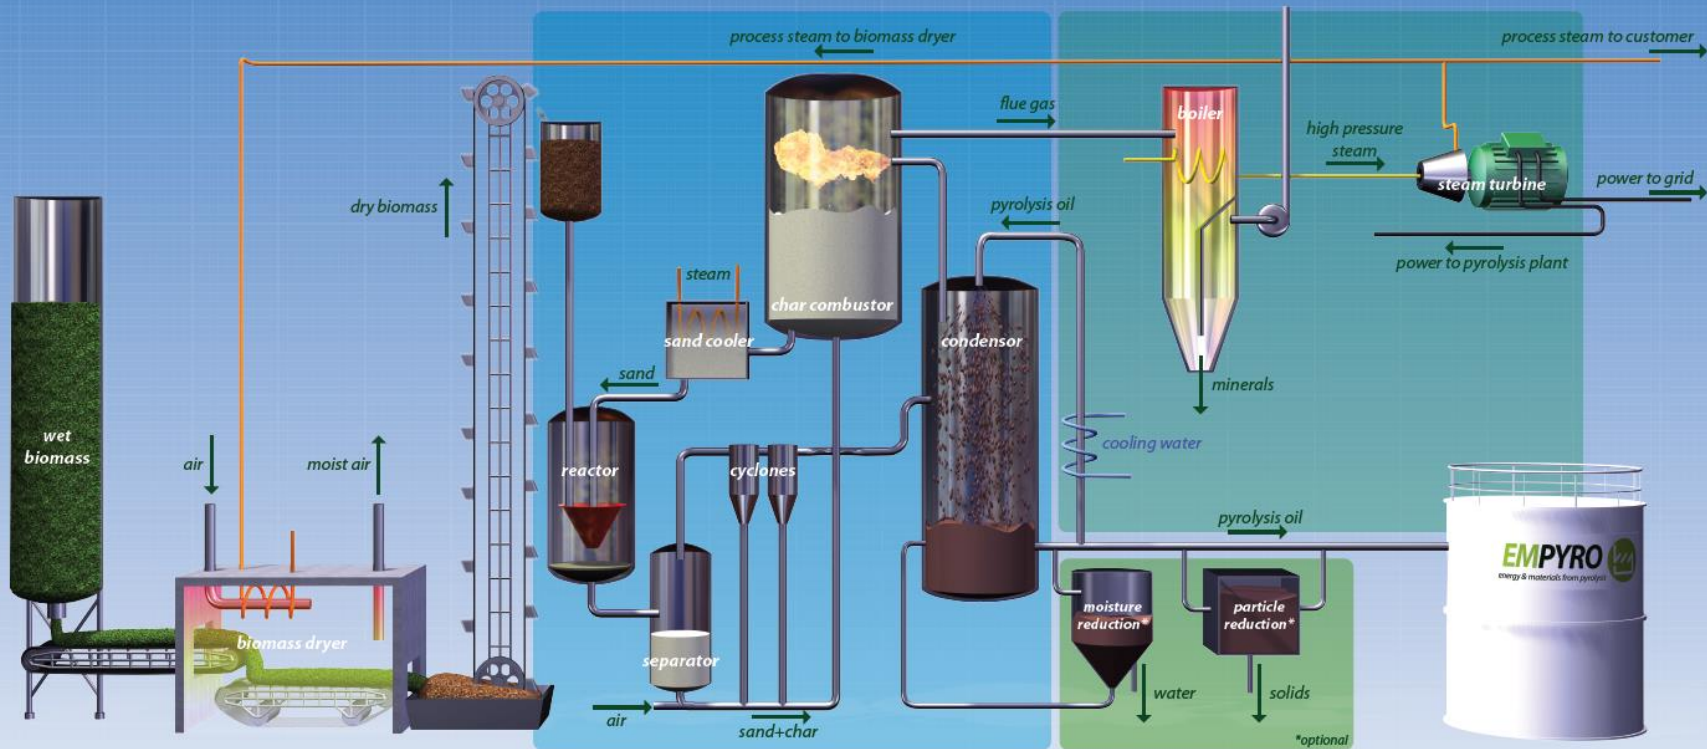


Pyrolysis oil, the sustainable alternative



The fast pyrolysis process

EMPYRO
energy & materials from pyrolysis

**Wood residue
(5 dry t/h)**

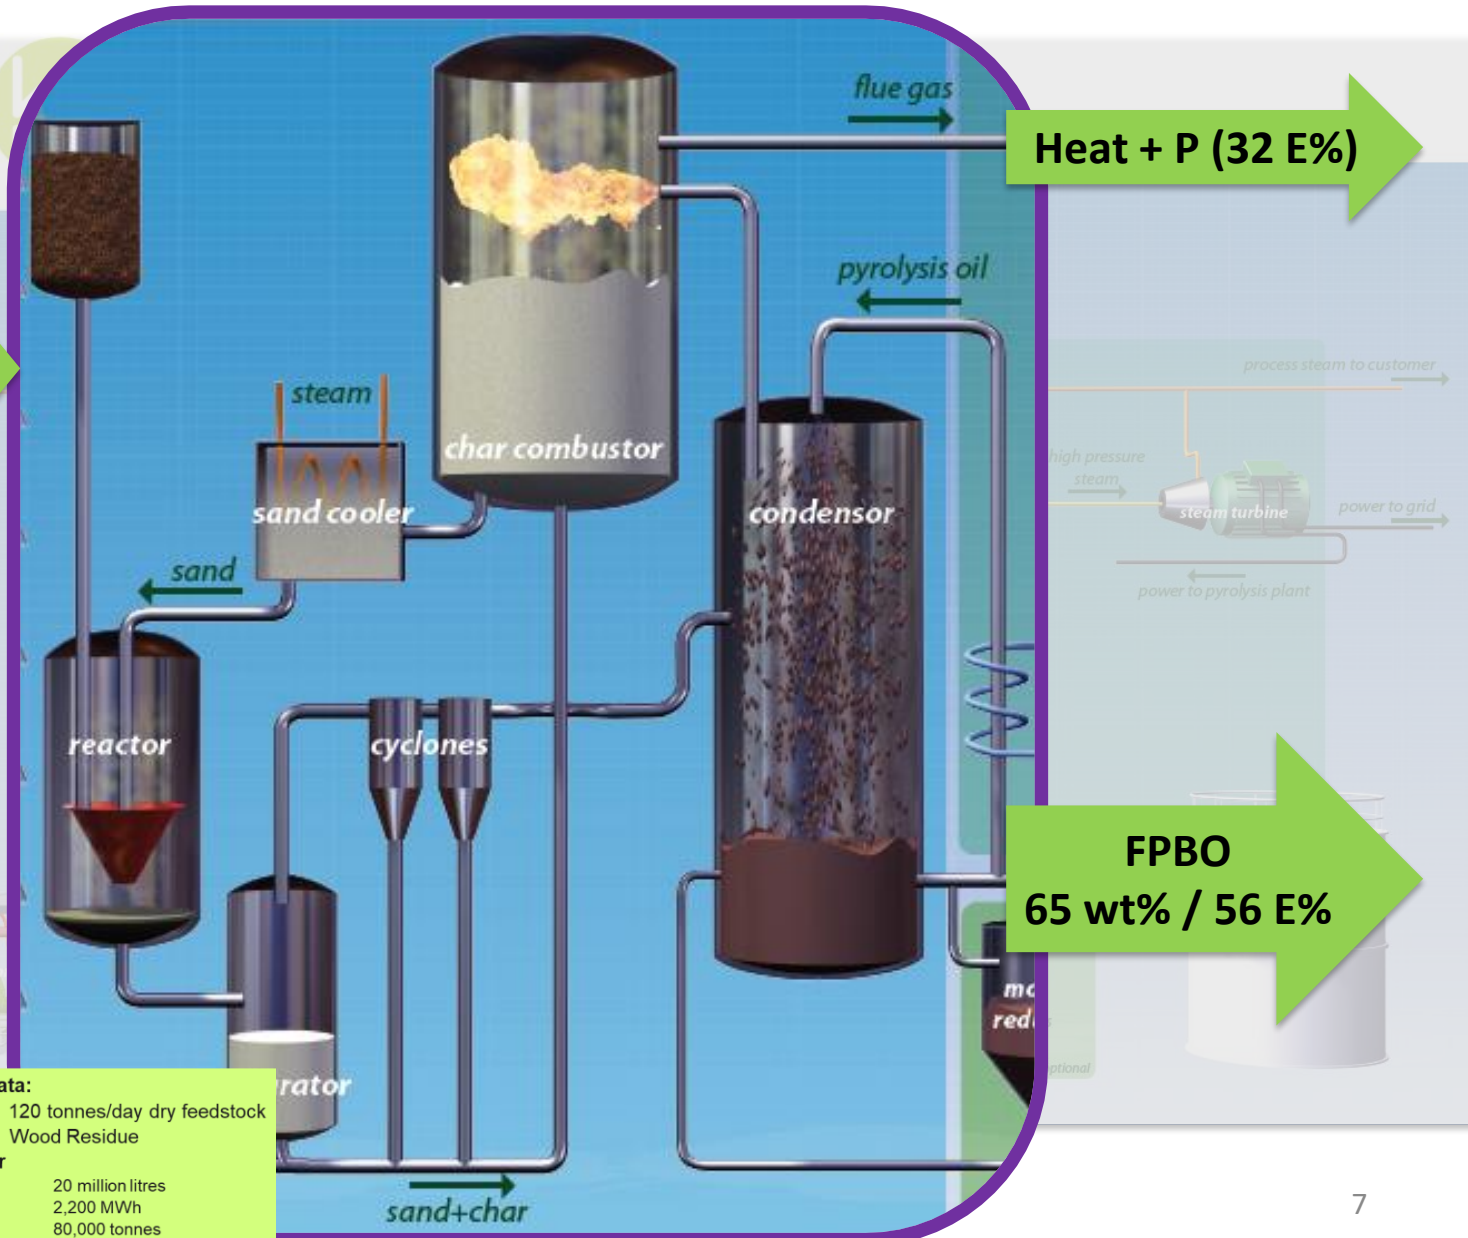

Empyro Plant Data:

Capacity	120 tonnes/day dry feedstock
Feedstock	Wood Residue
Output per year	
• Oil	20 million litres
• Electricity	2,200 MWh
• Steam	80,000 tonnes
• CO2- eq. reduction	24,000 tonnes

Empyro: commercial FPBO production



Commissioning


- March 2015: First litres of oil; delivery of steam to AkzoNobel
- August 2015: Delivery of FPBO to FrieslandCampina
- October 2016: Steam turbine commissioned
- October 2017: Empyro reaches nameplate capacity
- January 2019: Empyro acquired by Twence

Economics

- Overall investment within original budget
- Actual oil production costs in line with predictions

Production

- Scale up of RCR very successful
- Team of 7 operators; 1 operator can run the plant
- ~ 25 million litres FPBO was produced after 3 years
- Oil yield around design value 65 wt%; quality excellent from start
- 3.3 tons of oil per hour + 7.4 MW_{th} steam; 650 kW_e Electricity (near 90% heat efficiency)

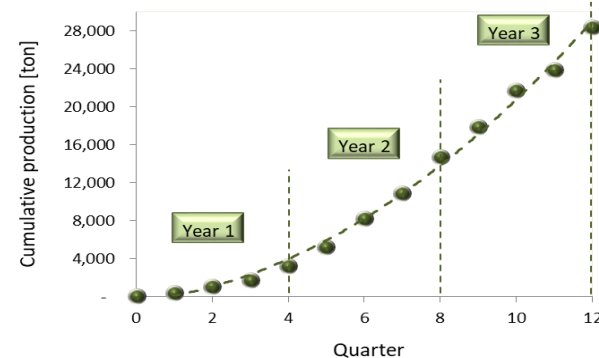

Pyrolysis oil, the sustainable alternative

Fast Pyrolysis: state of the art



FPBO production

- Mar 2015: start-up of Empyro
- Plant now runs steadily, 24/7, at design capacity
- Biomass is certified for its sustainable origin
- Jan 2019: Empyro was acquired by Twence
- Apr 2019: new FPBO plant sold to GFN (Finland)
- Sept 2019: new FPBO plant sold to Pyrocell (Sweden)



FPBO application (by FrieslandCampina)

- FPBO is used to replace 10 million m³ natural gas
- Sustainable heat is used for producing dairy products
- Switch from gas to FPBO gives 93% GHG reduction*
- Boiler runs without problems, processed all Empyro oil
- Borculo site reduced overall CO₂ footprint by 15%

**Source: 2017 audit of Empyro*

Pyrolysis oil, the sustainable alternative



Commercial roll out



Empyro Twence, Hengelo
The Netherlands



Lieksan biojalostamo



Green Fuel Nordic, Lieksa
Finland

Pyrocell Setra, Gävle
Sweden



Pyrolysis oil, the sustainable alternative



BTL & TechnipFMC: realizing FPBO together



Together we deliver turnkey Fast Pyrolysis Bio-Oil production plants

- We support our customers from the first basic design up to and including the operation of their commercial FPBO plant
- We have the skills to support refiners in (co-)processing FPBO for the production of advanced biofuels

Since 2016 we integrated the unique expertises of BTL & TechnipFMC



- Decades of experience with biomass and fast pyrolysis
- Proprietary Fast Pyrolysis technology (rotating cone reactor)
- Realized Empyro, the first commercial FPBO plant operating 24/7



- One of the world's largest Engineering & Construction companies
- Extensive track record in successful delivery of turnkey contracts
- Provides all services from basic engineering up to commissioning
- 60 years experience in refinery technologies (e.g. FCC, hydrogen, ...)



Pyrolysis oil, the sustainable alternative

Fast Pyrolysis Bio Oil Applications



Pyrolysis oil, the sustainable alternative

Fast Pyrolysis Bio-Oil Applications

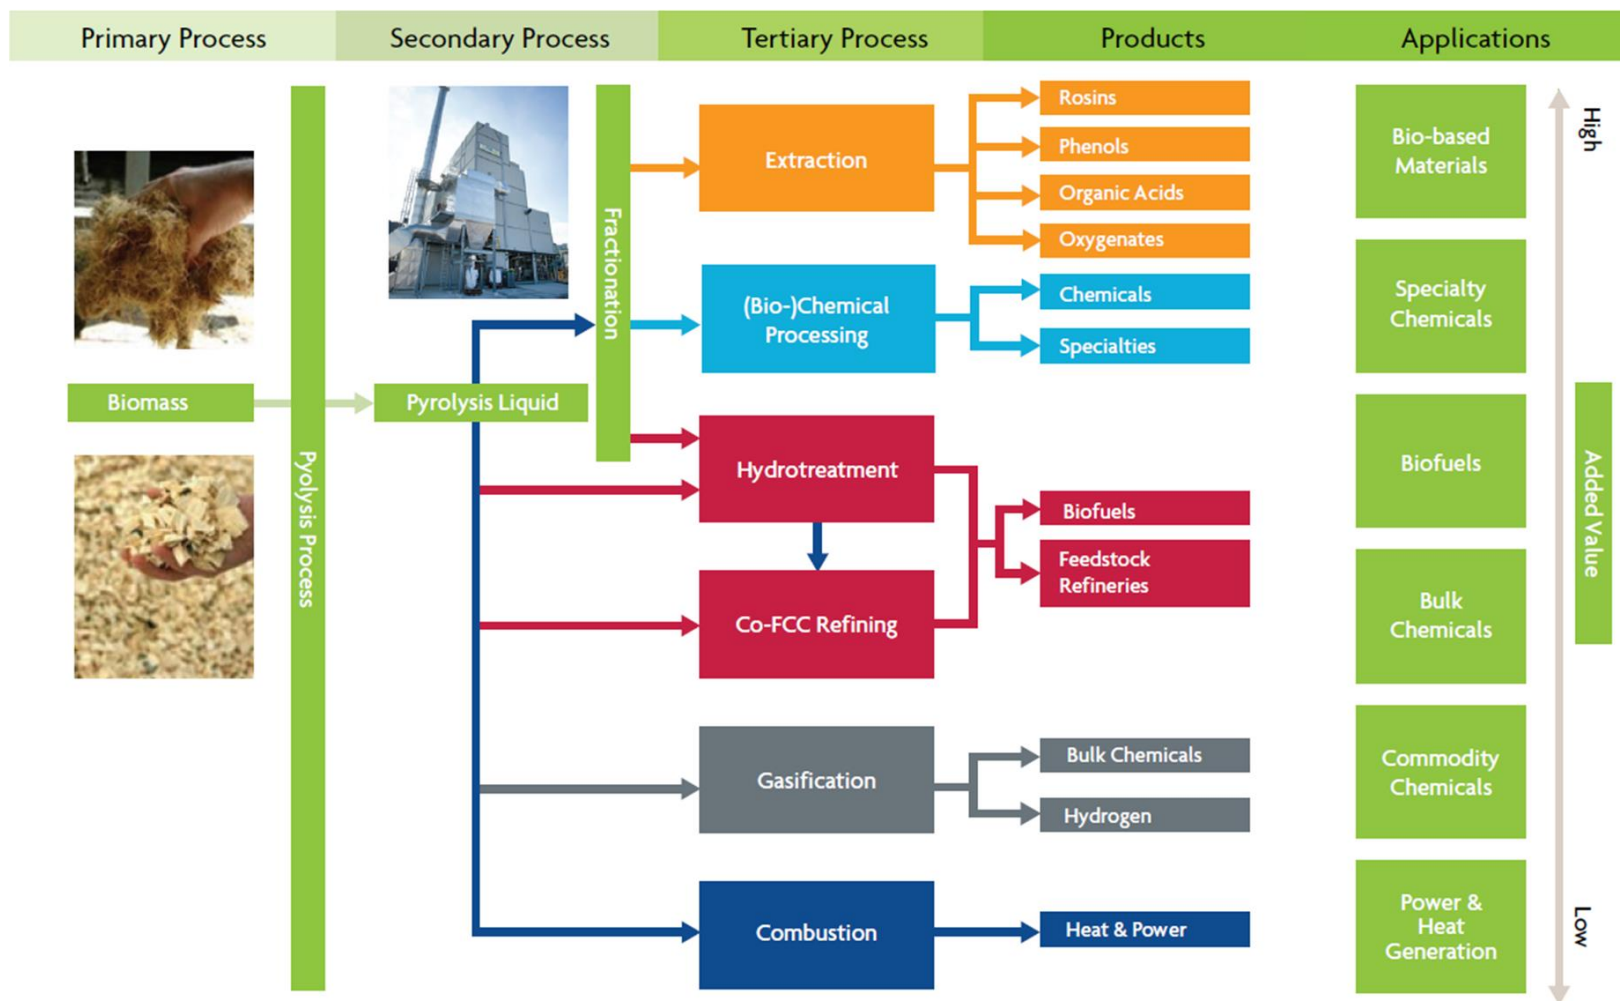


Figure based on BTG Biomass Technology Group B.V. intellectual property




Pyrolysis oil, the sustainable alternative



Pyrolysis Oil Application


Industrial Steam Generation at FrieslandCampina

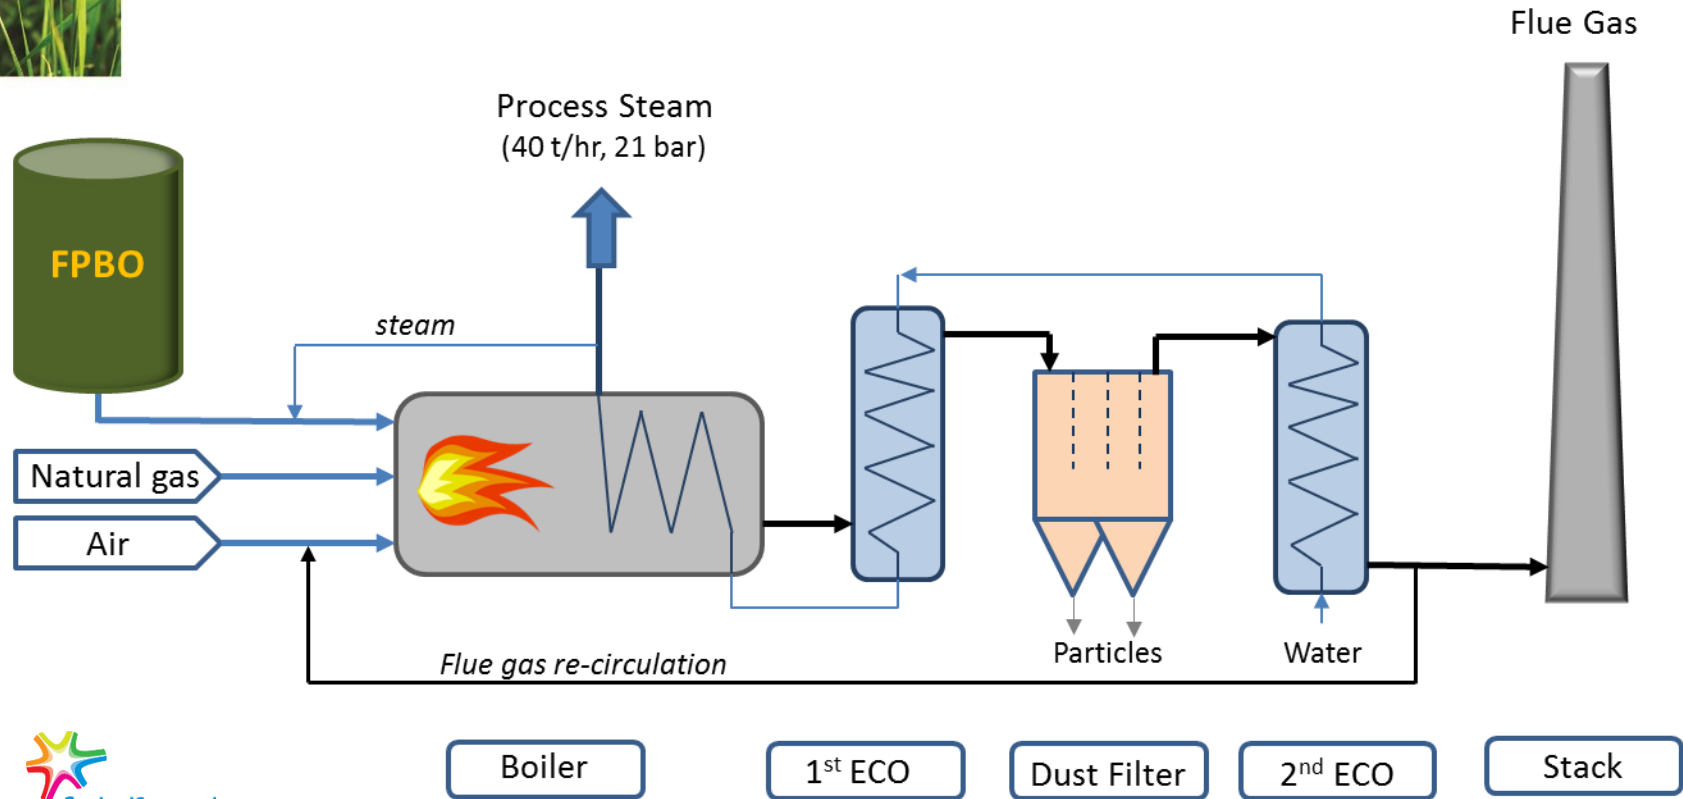


Schematic drawing of Process Steam Boiler at FrieslandCampina

Pyrolysis oil, the sustainable alternative

Fast pyrolysis developments: advanced biofuels

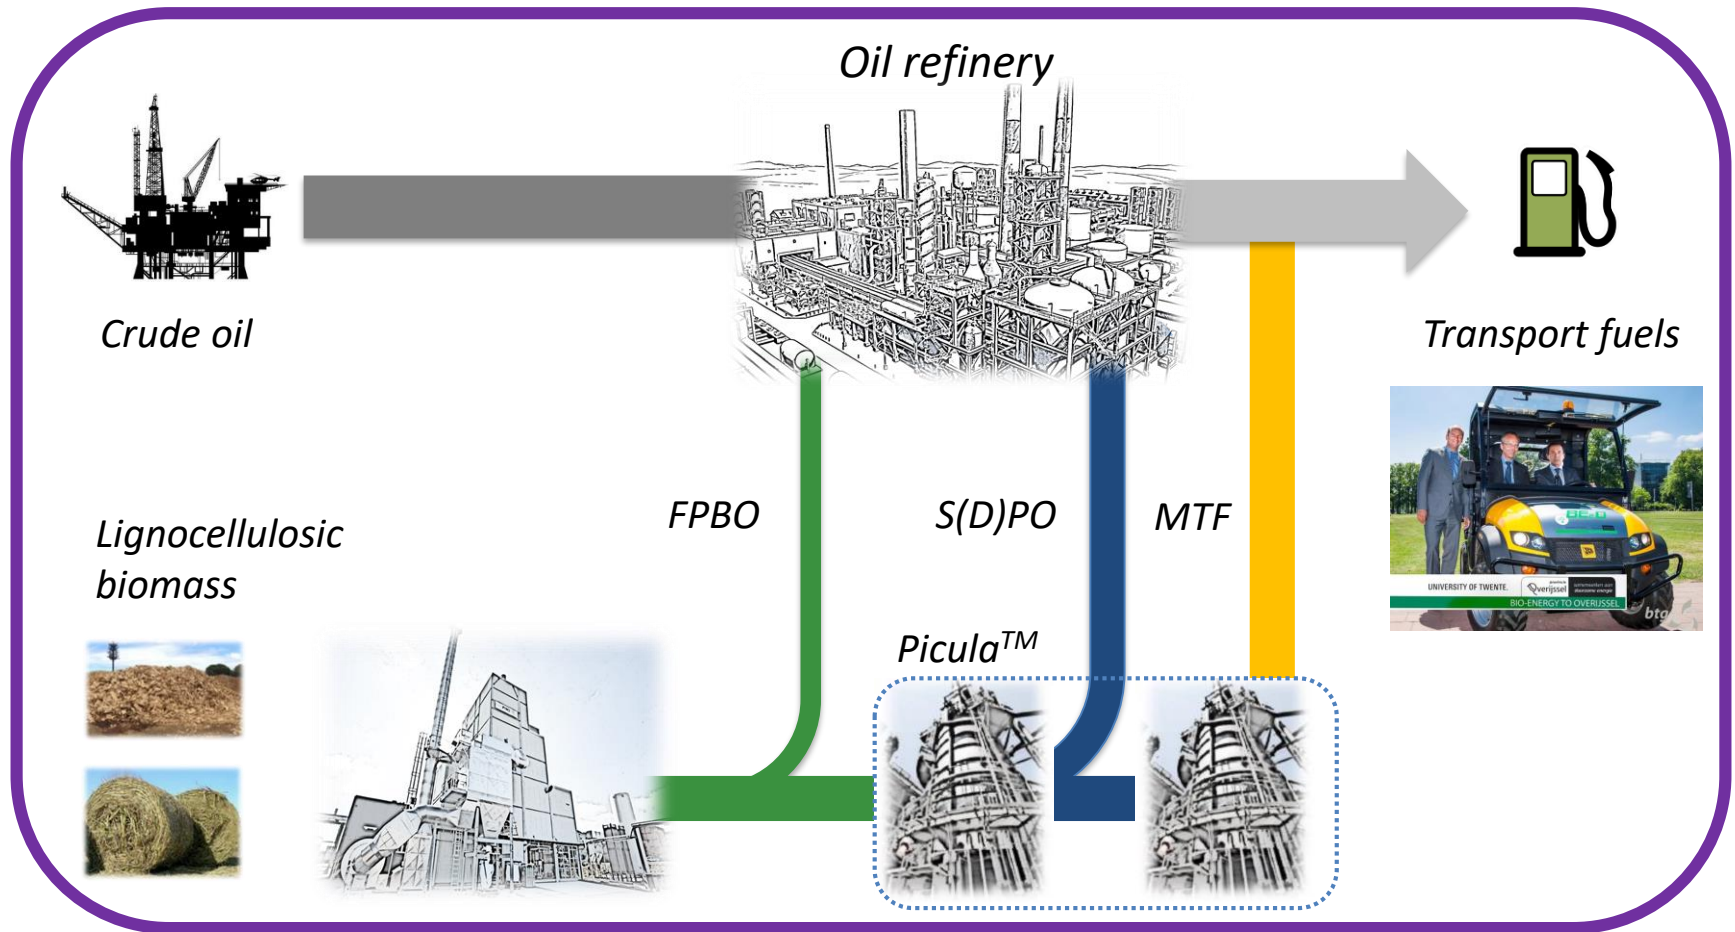

Co-FCC of FPBO: how does it work?

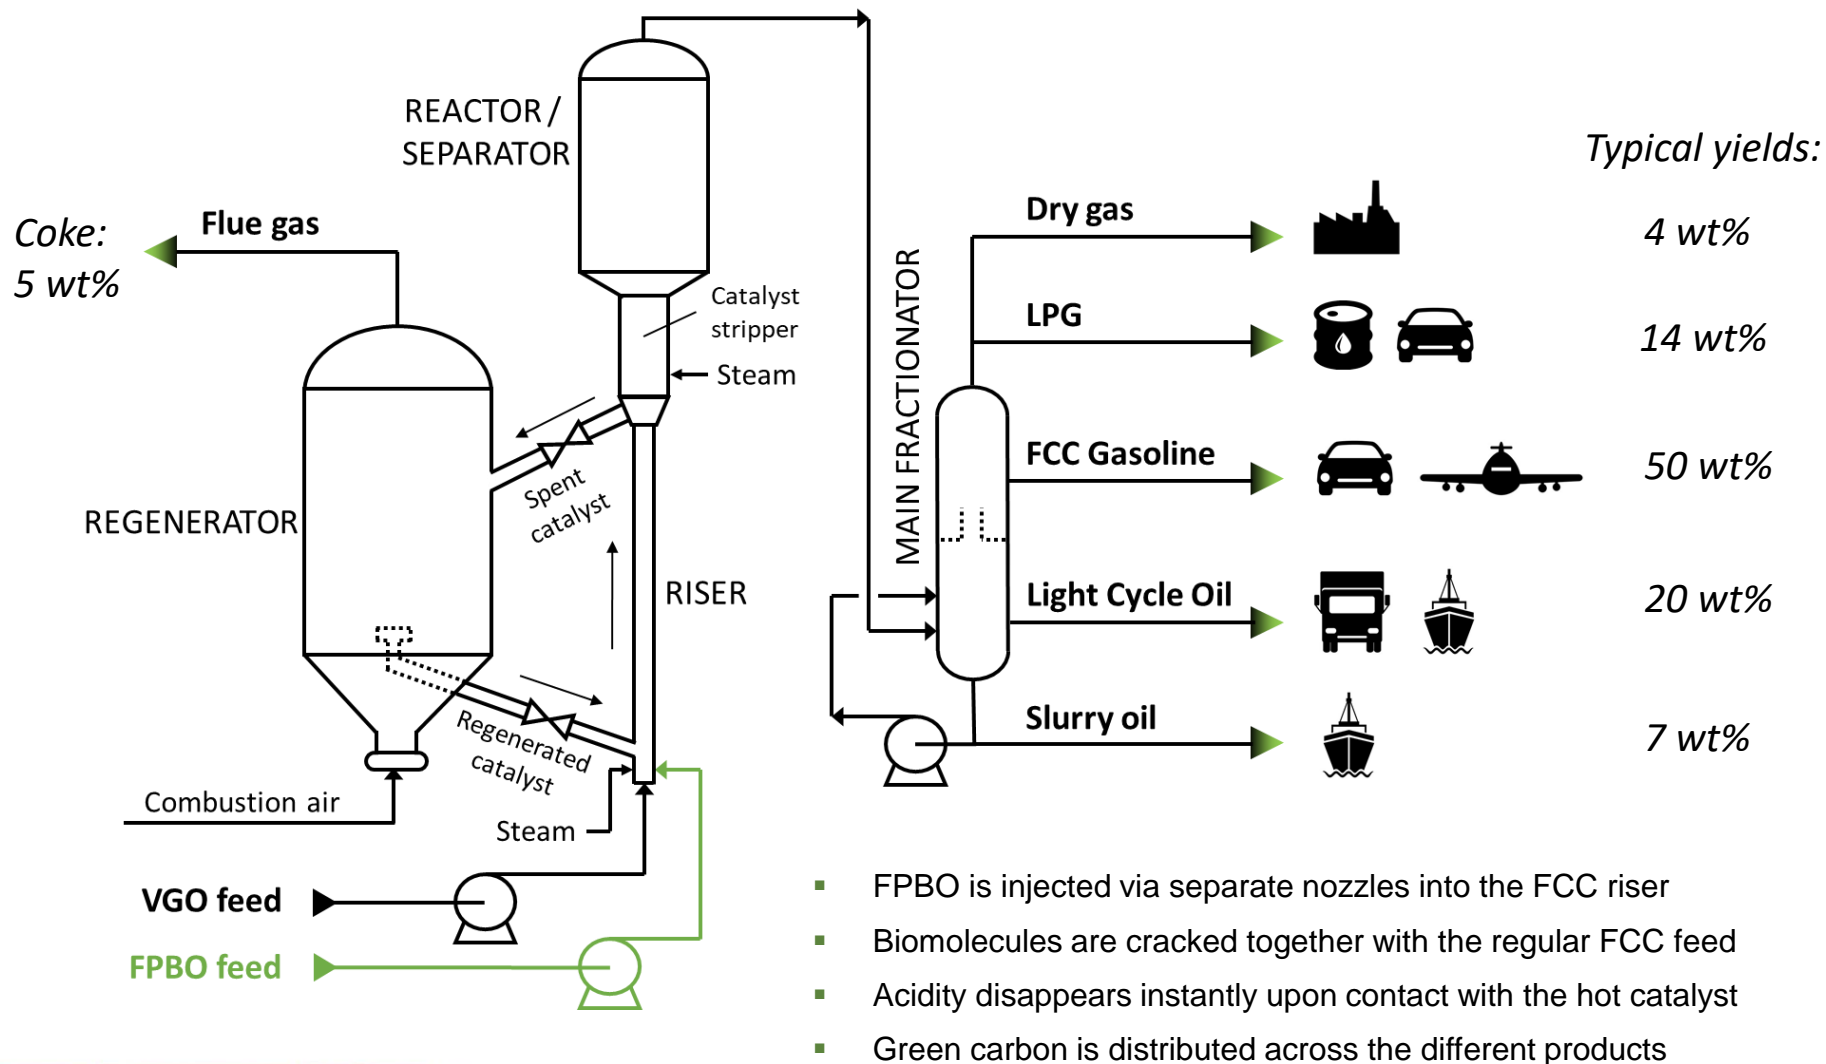

Pyrolysis oil, the sustainable alternative



Summary & perspectives



- Fast pyrolysis is proven at commercial scale, worldwide capacity is expanding.
- Current FPBO application is as renewable heating oil (replacing e.g. natural gas).
- Government mandate for advanced biofuels requires refiners to look at alternatives for fossil or edible vegetable oils. Preem (Sweden) is the first refiner that openly declared they will use FPBO to make advanced biofuels.
- Co-processing crude Fast Pyrolysis Bio-Oil in FCC units is a low-capex option that is proven at demo scale as a viable way to meet renewable fuel requirements, with little to no impact on refinery operations when co-processing 5 wt-% or less.
- Co-processing higher FPBO shares to get more bio-C in the products can be achieved with a mild FPBO hydrotreatment step.*
- Hydrotreatment can make other applications (e.g. steam cracker feed) possible. A green premium is probably required for the business case.
- FPBO fractionation for biomaterial applications is being scaled up as well. Lignin fraction of FPBO could also be an interesting cracker feedstock.

* [Venderbosch et al. 2018](#)



Visiting address
Josink Esweg 34,
7545 PN, Enschede
The Netherlands

Contact
T +31 (0)53 486 1186
F +31 (0)53 486 1180
E office@btg-btl.com

Follow us:
btg-btl.com
youtube.com/BTGBioliquids
twitter.com/BTG_BTL